

Aquatherm Econorad Radiators

Model Details


Model Type EH

Single panel Radiator, horizontal type.




Model Type EH-2

Double panel Radiator, horizontal type.

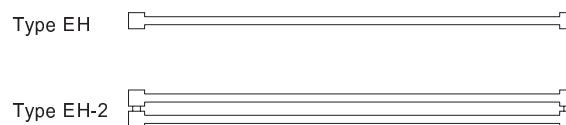

Model Type EV

Single panel wall heater, vertical type.

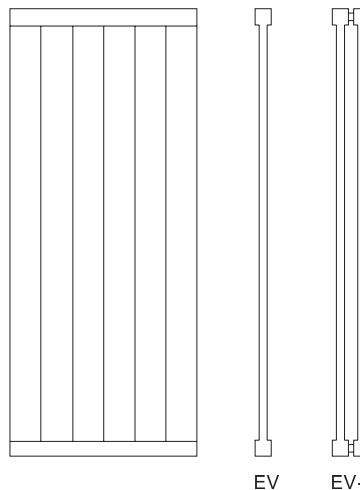


Model Type EHE

Single panel Radiator with lamina attached, horizontal type.



Model Type EHE-2

Double panel Radiator with lamina attached to each panel, horizontal type.



Model Type EHE/H

Double panel Radiator with lamina between, horizontal type.




Aquatherm Econorad Radiators

Heater Panels

Model Types EH + EH-2

Dimensions and Technical Data

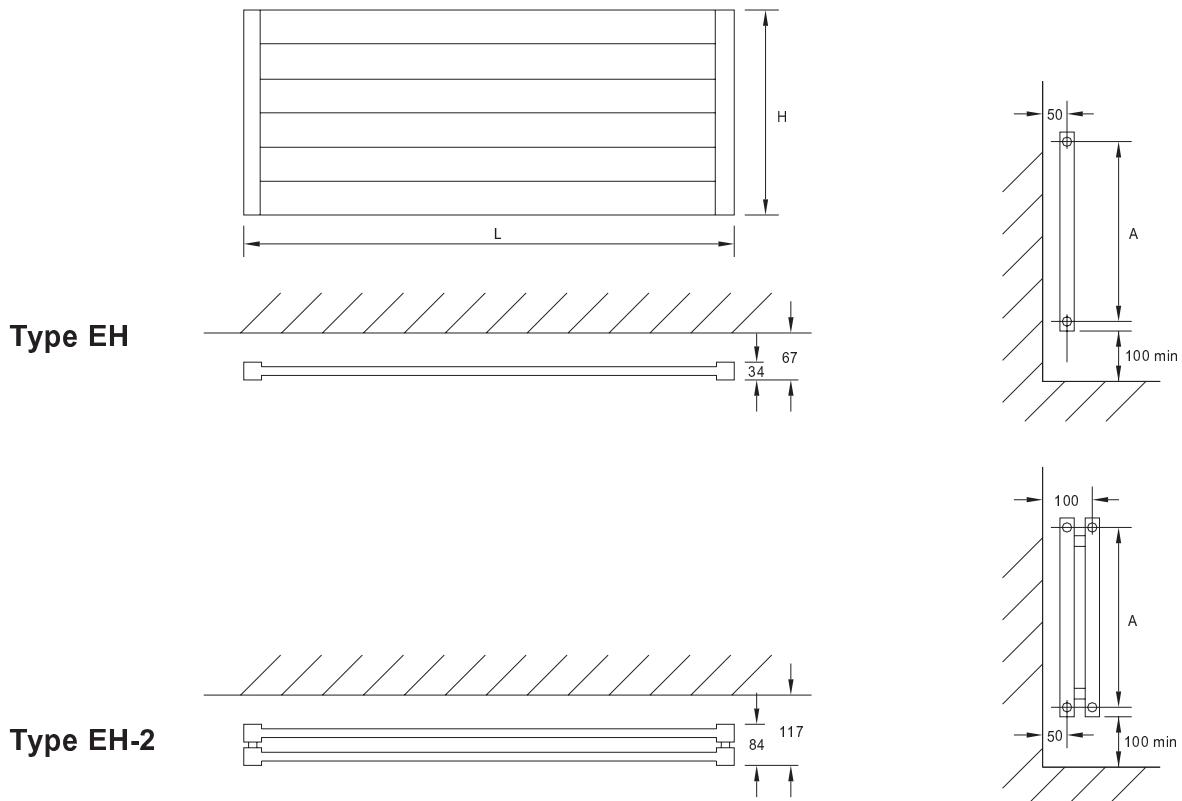


| Description | Type EH | Type EH-2 |
|--------------------------------|-------------------------|-------------------------|
| Height | H | 140 to 770 |
| Length | L | 400 to 3000 |
| Connection Distance | A | H minus 50 |
| Weight * | 11.15 kg/m ² | 11.15 kg/m ² |
| Water Content | 4.15 L/m ² | 4.15 L/m ² |
| Ordering Specification Example | | |
| 560mm high x 2000mm long | EH 56 x 2000 | EH 56-2 x 2000 |

* Weight based on surface area - Refer pages 7-12

**Aquatherm Econorad Radiators
Heater Panels
Model Types EHE, EHE-H, EHE-2**

Dimensions and Technical Data

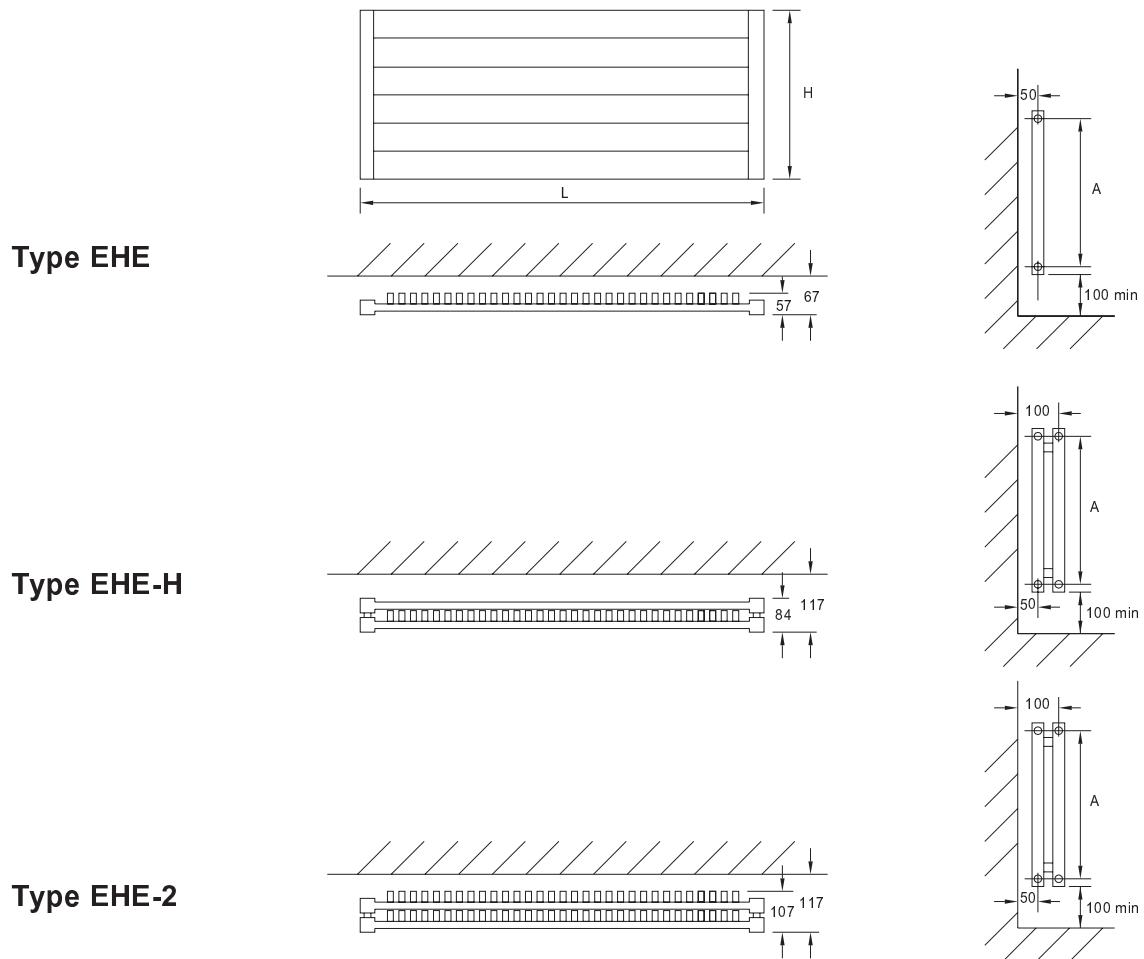


| Description | Type EHE | Type EHE-H | Type EHE-2 |
|--------------------------------|---------------|------------------------------|------------------------------|
| Height | H | 350 to 770 | 350 to 770 |
| Length | L | 400 to 3000 | 400 to 3000 |
| Connection Distance | A | H minus 50 | H minus 50 |
| Weight * | | approx 4.2 kg/m ² | approx 5.6 kg/m ² |
| Water Content | | approx 1 L/m ² | approx 1.6 L/m ² |
| Ordering Specification Example | | | |
| 560mm high x 2000mm long | EHE 56 x 2000 | EHE 56-H x 2000 | EHE 56-2 x 2000 |

* Weight based on surface area - Refer pages 7-12

**Aquatherm Econorad Radiators
Heater Panels
Model Types EV, EV-2**

Dimensions and Technical Data

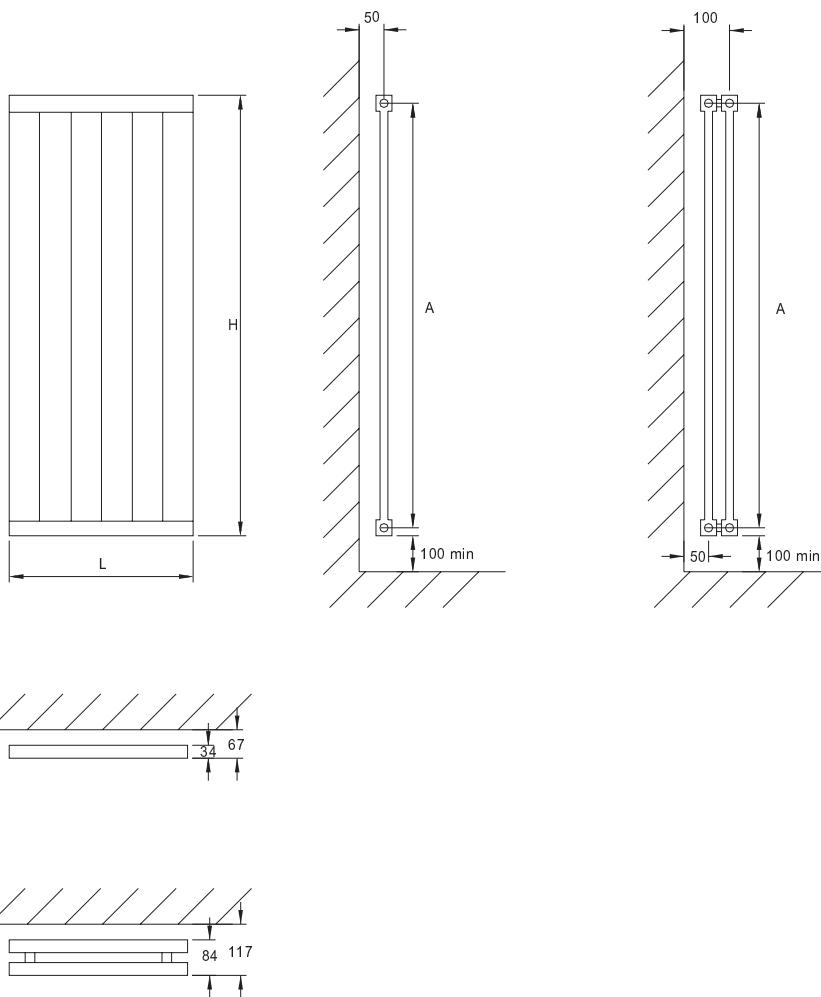



| Description | Type EV | Type EV-2 |
|--------------------------------|--------------------------------|--------------------------------|
| Height | H | 600 to 2800 |
| Length | L | 140 to 770 |
| Depth | T | 34 |
| Connection Distance | A | H minus 35 |
| Weight | approx 11.15 kg/m ² | approx 11.15 kg/m ² |
| Water Content | approx 4.15 L/m ² | approx 4.15 L/m ² |
| Ordering Specification Example | | |
| 560mm long x 1000mm high | EV 56 x 1000 | EV 56-2 x 1000 |

* Weight based on surface area - Refer pages 7-12



Aquatherm Econorad Radiators

Radiator Mounting Details

All Horizontal Panels

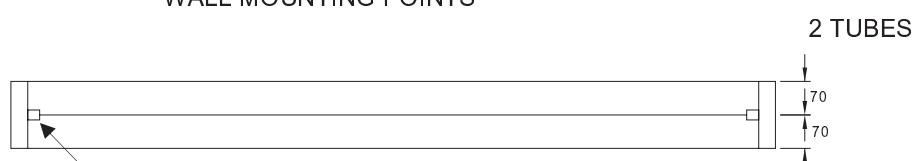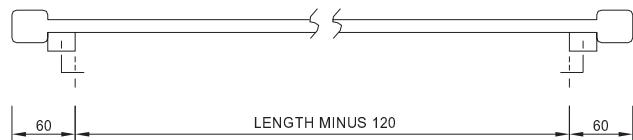

Radiator mounting bracket positions

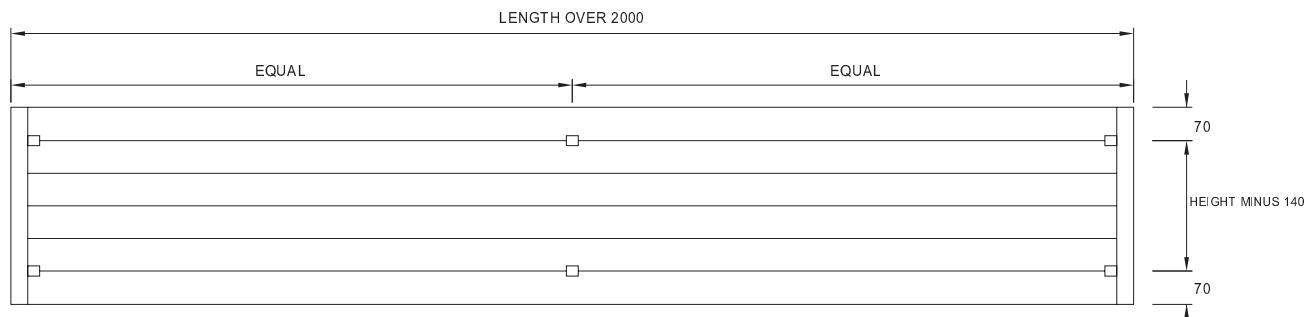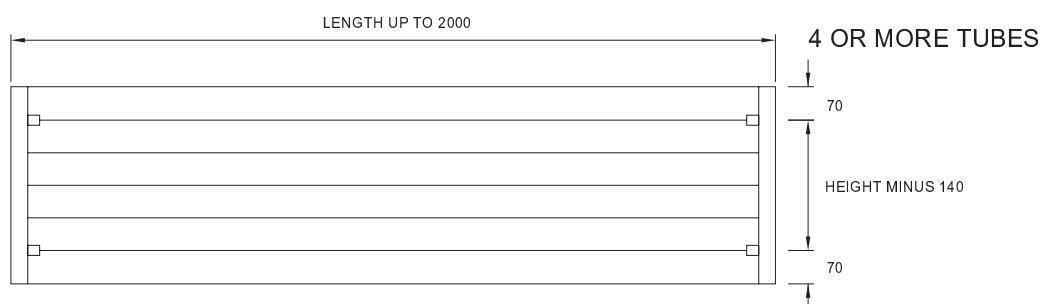




Note

Radiators over 2000 wide have additional central brackets

Aquatherm Econorad Radiators


Radiator Mounting Details

All Vertical Panels

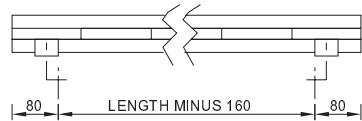


WALL MOUNTING POINTS


Radiator mounting bracket positions

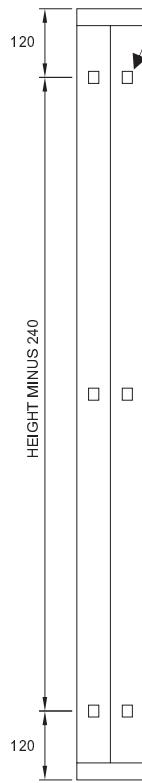

2 TUBES

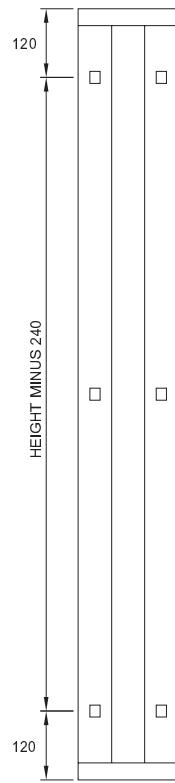

3 TUBES

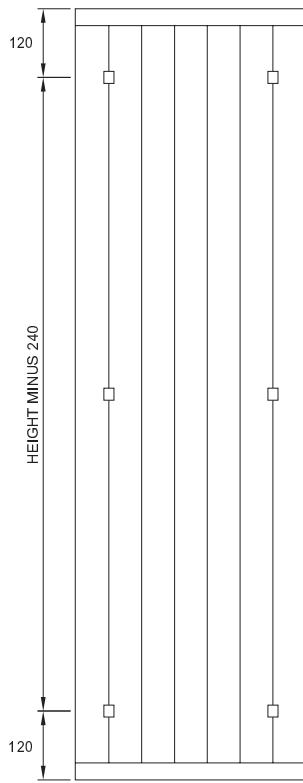


4 OR MORE TUBES

Note


Radiators over 2000 wide have additional central brackets

Aquatherm Econorad Radiators Connection Options and Codes

→ STANDARD
⇒ OPTIONAL

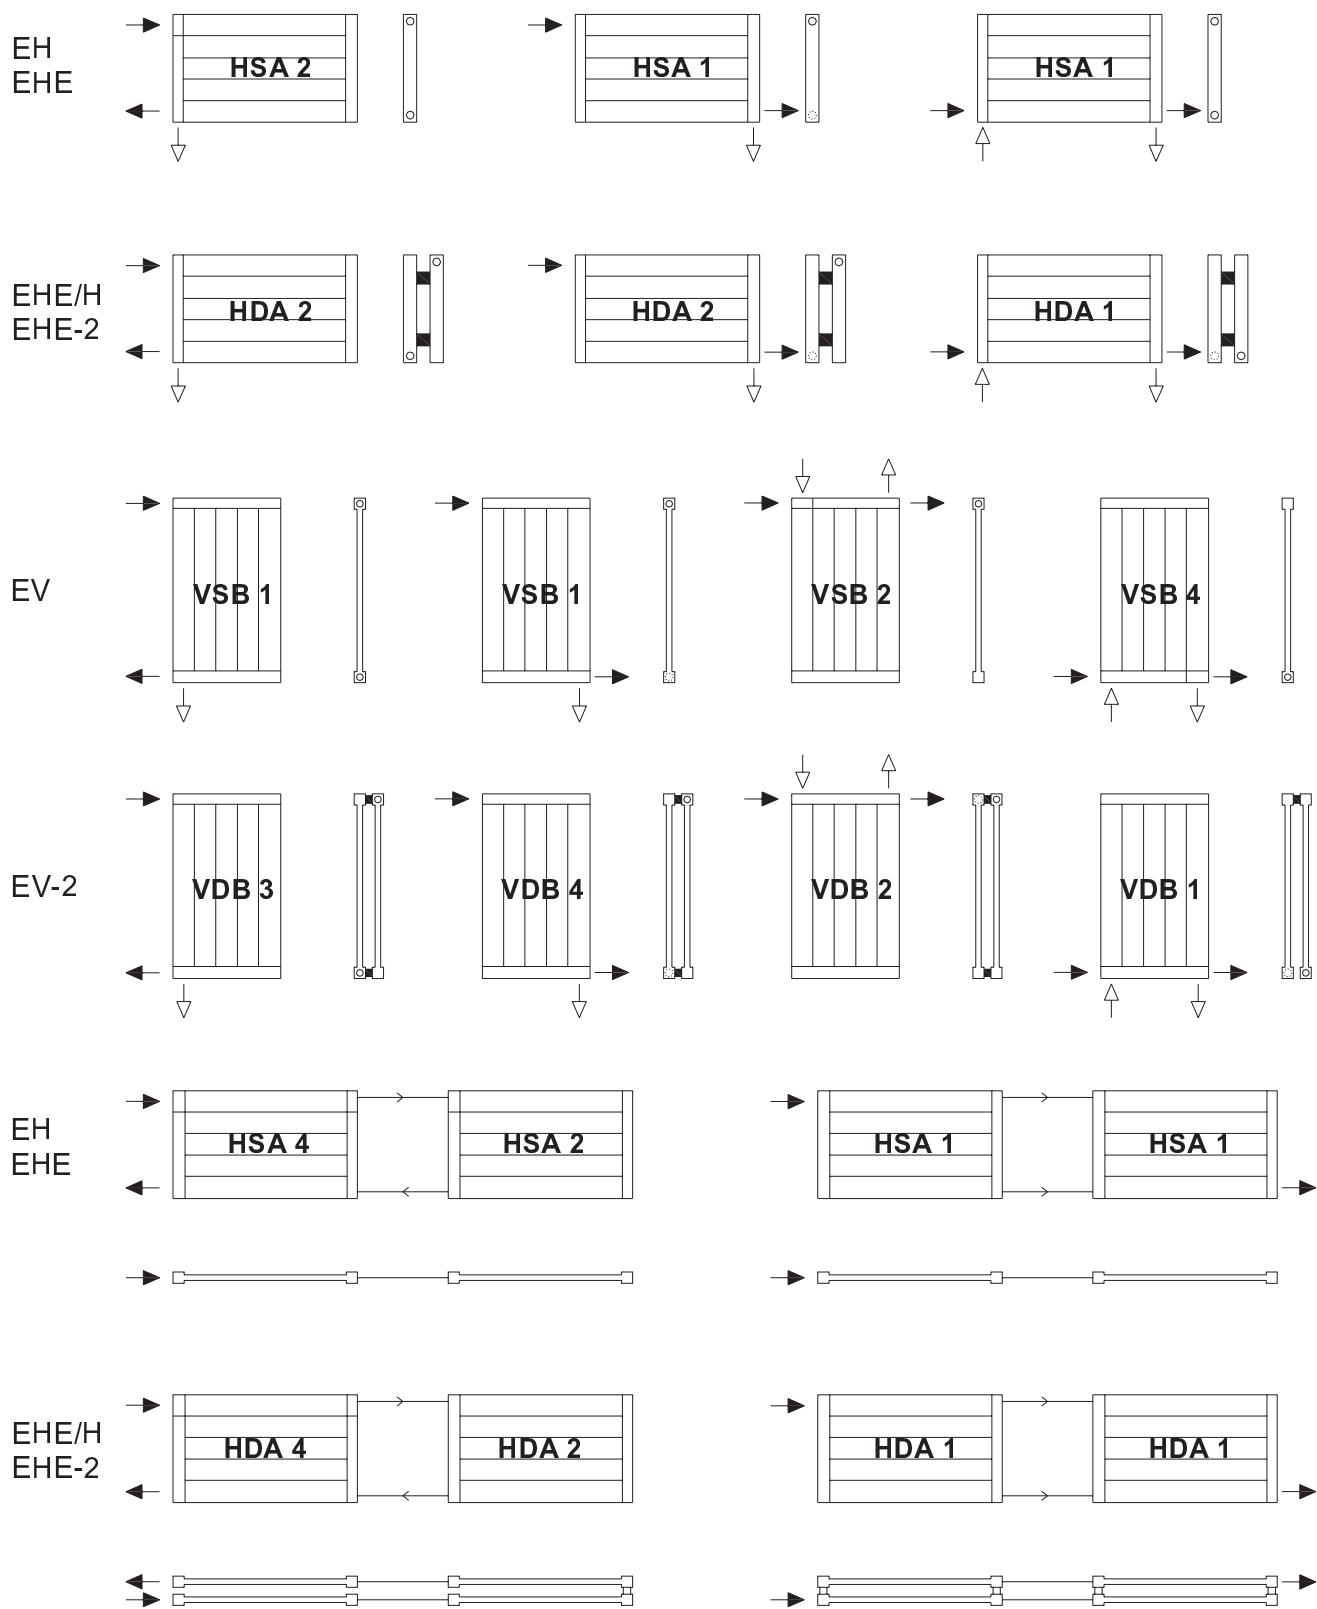

Aquatherm Econorad Radiators Wall Mounting Bracket Typical Mounting Details

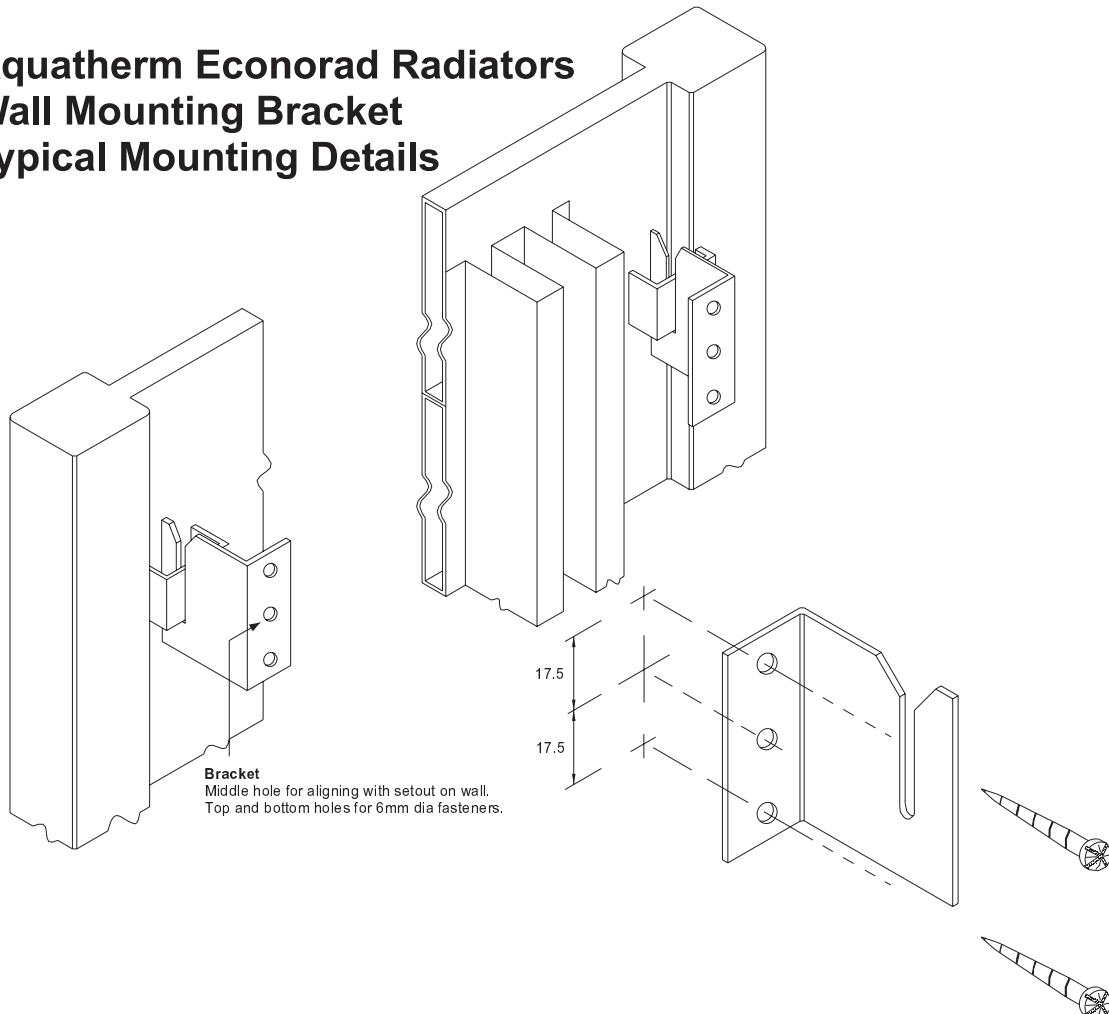

ORDERING REQUIREMENTS

As standard the Aquatherm radiator is supplied with one 1/2 inch aircock and one 1/2 inch plug is provided for fitting to suit the particular application.

The standard arrangement caters for all applications where the flow and return connections are required at opposite ends of the radiator.

All other connections arrangements must be manufactured to order and complete details are necessary at time of ordering.

All radiator units require special baffles to be fitted during manufacture.

3/4 inch connection available upon request.

OPTIONAL ACCESSORIES

PLUG 1/2 inch



AIRCOCK 1/2 inch standard



Key

