

Model	OPA 250RLTFPQ-S3
Configuration	Horizontal Supply Air
Item No. (Standard / Opposite Hand)	876-025-701 / 876-025-710
Unit c/w Fresh Air Cowl (OPA 250RLTFPQ-C)	878-025-701 / 878-025-710
Configuration	Downward Supply Air
Item No. (Standard / Opposite Hand)	876-025-723 / 876-025-732
Unit c/w Fresh Air Cowl (OPA 250RLTFPQ-C)	878-025-723 / 878-025-732
Cooling capacity (net) ¹	24.6 kW
Cooling capacity range (gross)	10.1 ~ 29.1 kW
Heating capacity ¹	26.9 kW
Heating capacity range	6.5 ~ 29.3 kW
Electrical input - cooling	7.7 kW
Electrical input - heating	8.1 kW
EER / AEER (cooling) ¹	3.20 / 3.18
COP / ACOP (heating) ¹	3.33 / 3.31
Unit Controller	UC8
Refrigerant	R32
Refrigerant Charge	8.0 kg
Minimum floor area (@2.4m below ceiling diffuser)	34.0 m ²
Compressor oil type	POE-46 (NXG5020 or equivalent)
Compressor type	inverter scroll
Power supply ²	3 ph. 400 V ac 50 Hz + N + E
Compressor (3ph.) run amps ¹	9.5 A/ph
Compressor + VSD circuit breaker	40 A
Indoor fan motor size	EC plug 450 dia. 3.94kW
Nominal air flow at rating conditions	1250 l/s
Indoor fan motor (3ph.) - full load	6 A/ph.
Outdoor fan motor (3ph.) - full load	4.6 A/ph.
Outdoor fan capacitor size	n/a
Outdoor fan max. static pressure@ 3000 l/s	125 Pa
Control circuit breaker (internal)	2 A
Auxiliary power outlet (1ph.) overload setting	10 A
Running amps (total system) ¹	12.5 / 11.5 / 13 A
Max. running amps (total system)	24 A/ph.
RCD type recommended	type B, 30mA, 3 pole
Net weight	511 kg
Shipping weight	567 kg
Net Weight c/w Fresh Air Cowl option	519 kg

Accessories:

Filters - rated EU4/G4 disposable	019-400-005 600x500x50 (x2) ³
Filters - rated EU4/G4 washable	019-000-034 600x500x50 (x2) ³
Drain tundish (set of 2)	060-000-653

Optional Controls:

TZT-100 Room temperature controller	201-000-350
-------------------------------------	-------------


Refer to temperzone for other options.

¹ Tested in accordance with AS/NZS 3823

² Voltage range: 380-440V


³ Filter sizes are nominal; refer to Temperzone for actual measurements.

DIMENSIONS (mm)






OPA 250RLTFP01(-C)-S3 Standard Hand, Horizontal Supply

Not to Scale





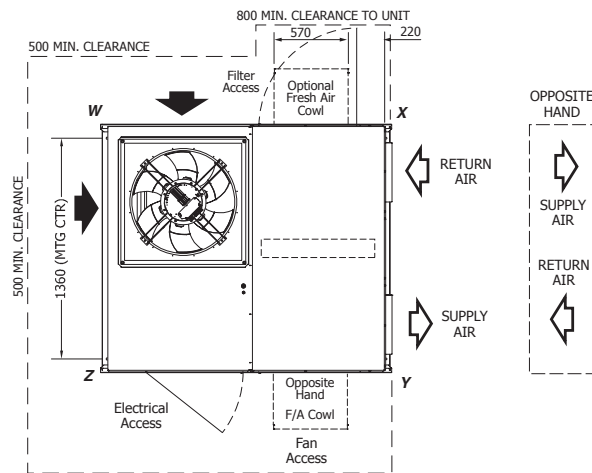


		POINT LOADS (kg)			
		W	X	Y	Z
Std Hd	no F/A	104	149	100	158
	cw F/A	105	153	102	159
Op Hd	no F/A	121	155	91	144



Multiple units side-by-side:
Allow a minimum of 1m
between coil faces.

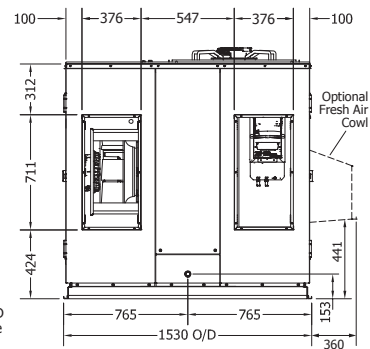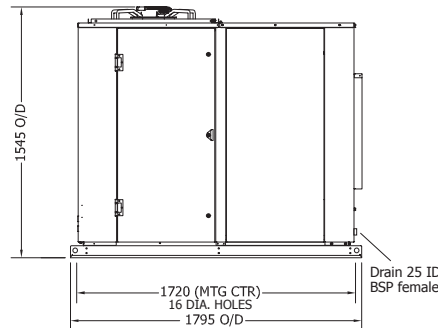

OPA 250RLTFP23(-C)-S3 Standard Hand, Downward Supply

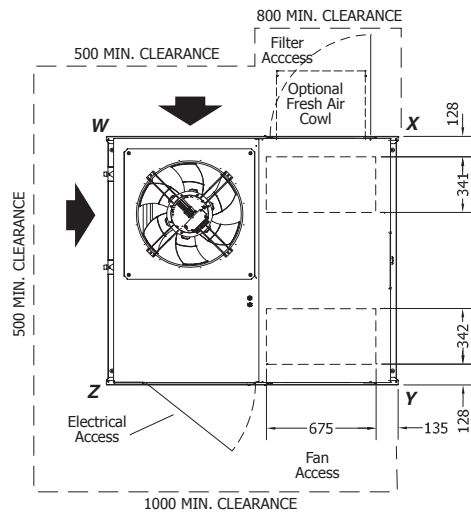

NOTE
Specifications are subject to change without notice due to the manufacturer's ongoing research and development programme.

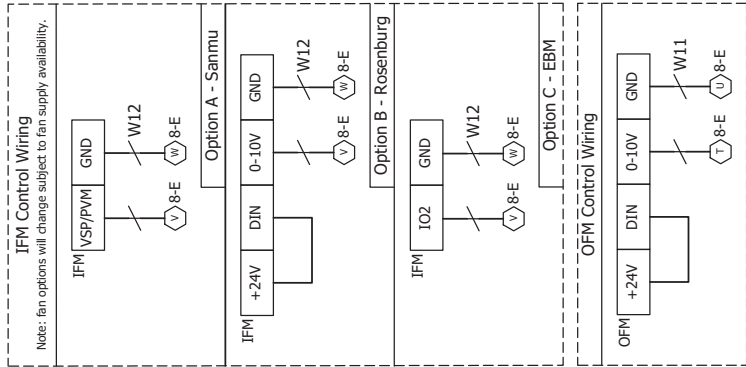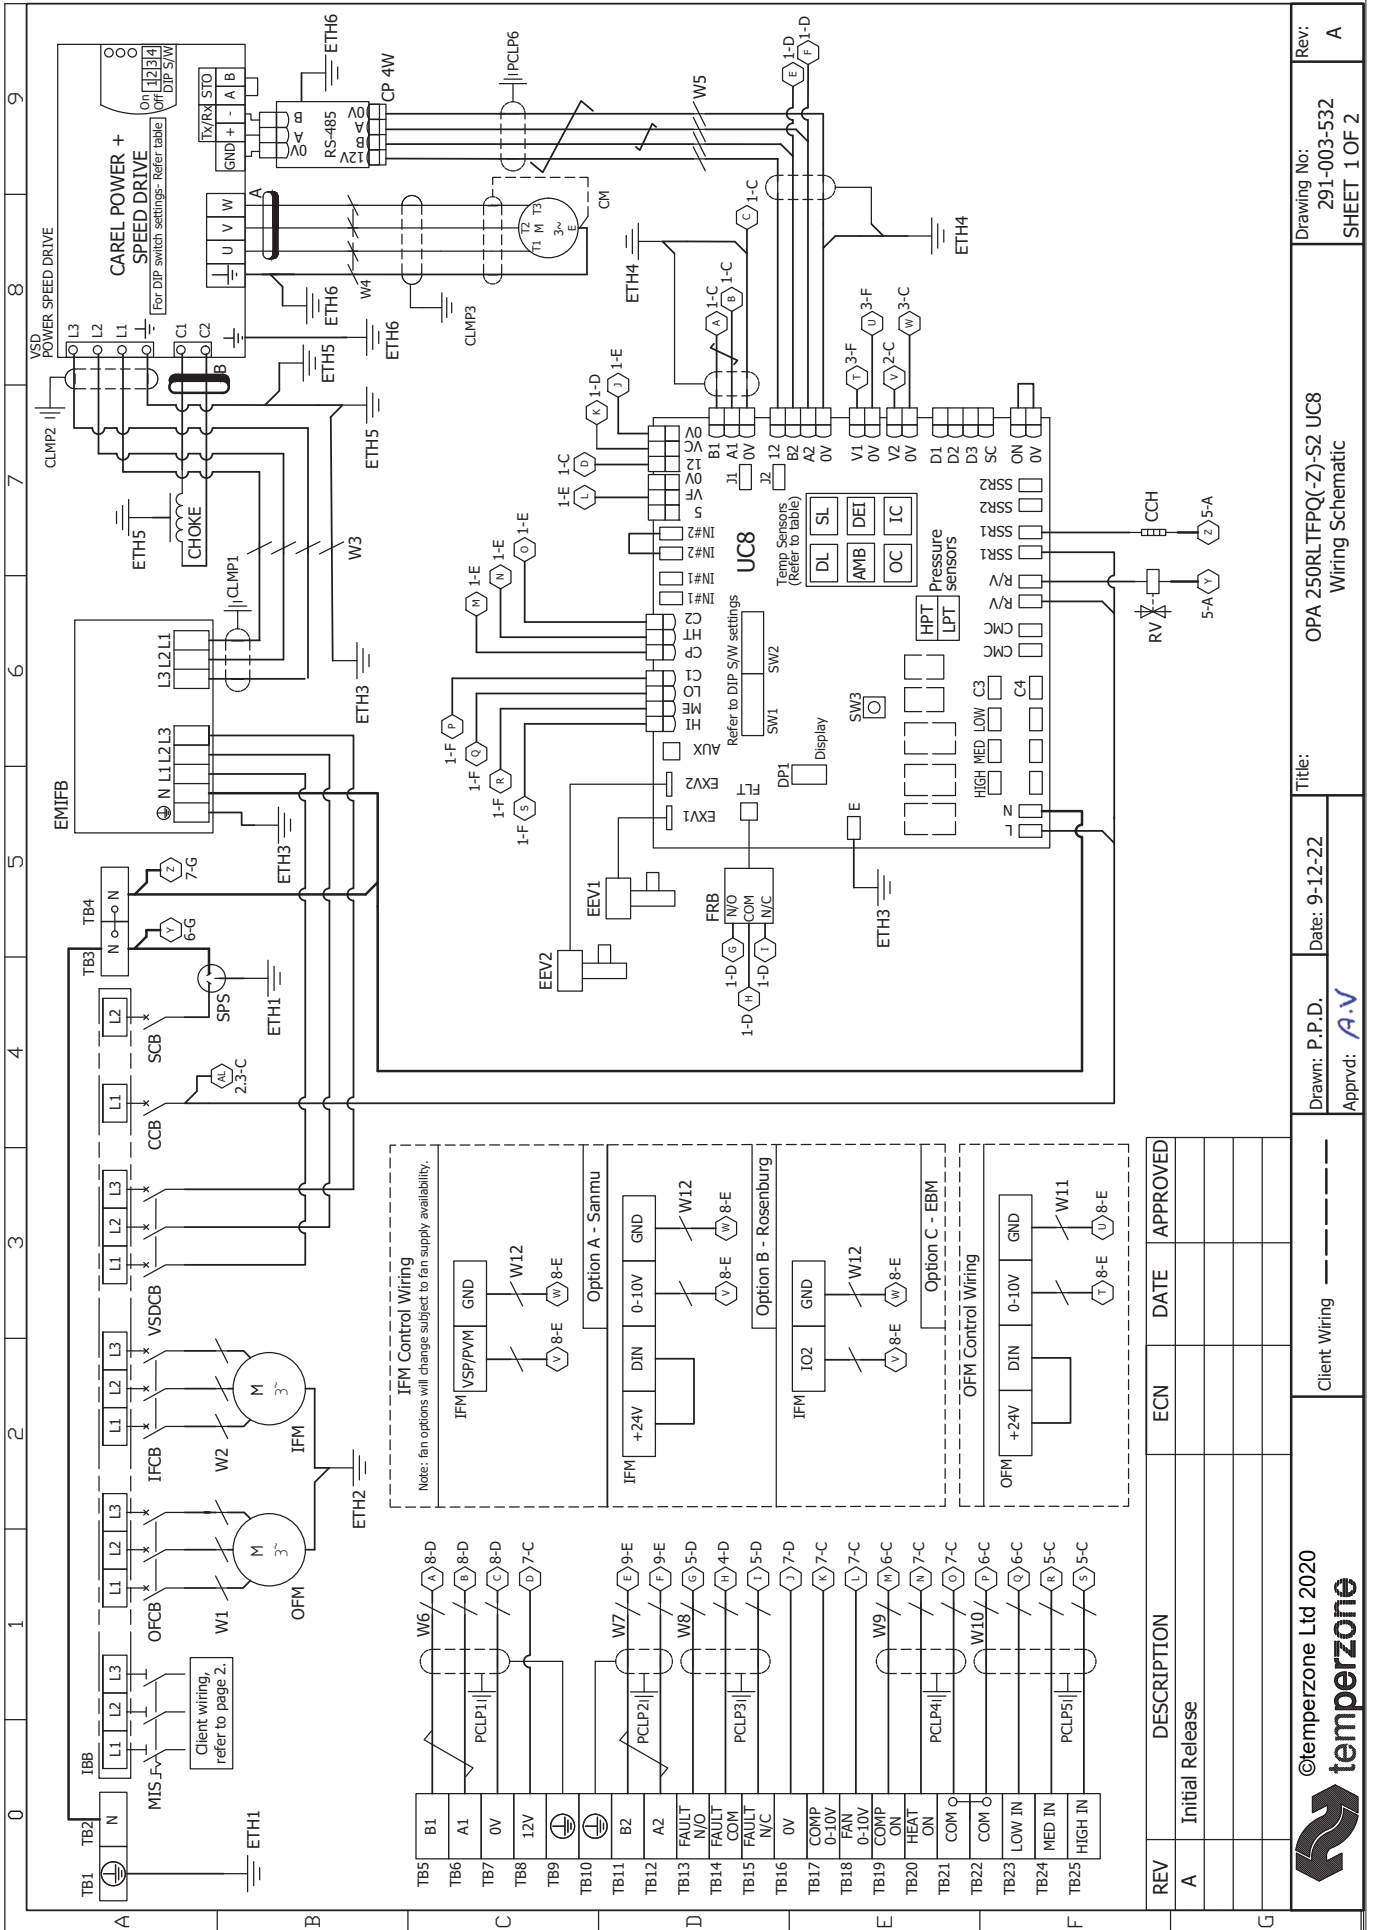

REV	DESCRIPTION	ECN	DATE	APPROVED
A	Initial Release			



©temperzone Ltd 2020

Client Wiring

Drawn: P.P.D. Date: 9-12-22

Title: OPA 250RLTFPQ(-Z)-S2 UC8 Wiring Schematic

Drawing No: 291-003-532 SHEET 1 OF 2

Rev: A

0	1	2	3	4	5	6	7	8	9																																																																																																											
<p>Client Wiring</p>	<p>Customer BMS Input</p>	<p>Ferrites</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Part Number</th> <th>Frequency Type</th> <th>Number of Turns</th> </tr> </thead> <tbody> <tr> <td>A 012-001-074</td> <td>High</td> <td>1</td> </tr> <tr> <td>B 012-001-094</td> <td>Low</td> <td>1</td> </tr> </tbody> </table>	Part Number	Frequency Type	Number of Turns	A 012-001-074	High	1	B 012-001-094	Low	1	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>24VCB</td> <td>24 Volt Circuit Breaker</td> </tr> <tr> <td>CCB</td> <td>Control Circuit Breaker</td> </tr> <tr> <td>CHH</td> <td>Crankcase Heater</td> </tr> <tr> <td>CM</td> <td>Compressor Motor</td> </tr> <tr> <td>DMF</td> <td>Damper Motor Fresh Air</td> </tr> <tr> <td>DMR</td> <td>Damper Motor Return Air</td> </tr> <tr> <td>EEV</td> <td>Electronic Expansion Valve</td> </tr> <tr> <td>EMIFB</td> <td>EMI Filter Board</td> </tr> <tr> <td>ETH</td> <td>Earth</td> </tr> <tr> <td>FRB</td> <td>Fault Relay Board</td> </tr> <tr> <td>IFCB</td> <td>Indoor Fan Circuit Breaker</td> </tr> <tr> <td>IFM</td> <td>Indoor Fan Motor</td> </tr> <tr> <td>IBB</td> <td>Insulated Bus Bar</td> </tr> <tr> <td>MIS</td> <td>Main Isolator Switch</td> </tr> <tr> <td>OFCB</td> <td>Outdoor Fan Circuit Breaker</td> </tr> <tr> <td>OFM</td> <td>Outdoor Fan Motor</td> </tr> <tr> <td>PCLP</td> <td>P Clip</td> </tr> <tr> <td>RV</td> <td>Reversing Valve</td> </tr> <tr> <td>SCB</td> <td>Socket Circuit Breaker</td> </tr> <tr> <td>SPS</td> <td>Single Phase Socket</td> </tr> <tr> <td>TB</td> <td>Terminal Block</td> </tr> <tr> <td>TR</td> <td>Transformer</td> </tr> <tr> <td>UC8</td> <td>Unit Controller 8</td> </tr> <tr> <td>VSD</td> <td>Variable Speed Drive</td> </tr> <tr> <td>VSDCB</td> <td>Variable Speed Drive Circuit Breaker</td> </tr> <tr> <td>W</td> <td>Cable Marker</td> </tr> </table>	24VCB	24 Volt Circuit Breaker	CCB	Control Circuit Breaker	CHH	Crankcase Heater	CM	Compressor Motor	DMF	Damper Motor Fresh Air	DMR	Damper Motor Return Air	EEV	Electronic Expansion Valve	EMIFB	EMI Filter Board	ETH	Earth	FRB	Fault Relay Board	IFCB	Indoor Fan Circuit Breaker	IFM	Indoor Fan Motor	IBB	Insulated Bus Bar	MIS	Main Isolator Switch	OFCB	Outdoor Fan Circuit Breaker	OFM	Outdoor Fan Motor	PCLP	P Clip	RV	Reversing Valve	SCB	Socket Circuit Breaker	SPS	Single Phase Socket	TB	Terminal Block	TR	Transformer	UC8	Unit Controller 8	VSD	Variable Speed Drive	VSDCB	Variable Speed Drive Circuit Breaker	W	Cable Marker	<p>Sensors (S) / Transducers (T)</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Colour</th> </tr> </thead> <tbody> <tr> <td>DL</td> <td>Discharge Temp</td> <td>S GREY</td> </tr> <tr> <td>SL</td> <td>Suction Temp</td> <td>S WHITE</td> </tr> <tr> <td>AMB</td> <td>Ambient Temp</td> <td>S YELLOW</td> </tr> <tr> <td>DEI</td> <td>De-ice Temp</td> <td>S BLUE</td> </tr> <tr> <td>IC</td> <td>De-ice Temp</td> <td>S BLUE</td> </tr> <tr> <td>LPT</td> <td>Suction Pressure</td> <td>T</td> </tr> <tr> <td>HPT</td> <td>High Pressure</td> <td>T</td> </tr> </tbody> </table>	Name	Type	Colour	DL	Discharge Temp	S GREY	SL	Suction Temp	S WHITE	AMB	Ambient Temp	S YELLOW	DEI	De-ice Temp	S BLUE	IC	De-ice Temp	S BLUE	LPT	Suction Pressure	T	HPT	High Pressure	T	<p>UC8 terminals</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>SAT-3</th> <th>TZT100 Terminals</th> </tr> </thead> <tbody> <tr> <td>12</td> <td>24</td> </tr> <tr> <td>B2</td> <td>B</td> </tr> <tr> <td>A2</td> <td>A</td> </tr> <tr> <td>0V</td> <td>GND</td> </tr> <tr> <td>Shield to 0V</td> <td>24C</td> </tr> </tbody> </table>	SAT-3	TZT100 Terminals	12	24	B2	B	A2	A	0V	GND	Shield to 0V	24C	<p>UC8 DIP switch settings</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>DIP switch</th> <th>↑ On/Off ↓</th> </tr> </thead> <tbody> <tr> <td>1,2,4,6,7,10,14</td> <td>On</td> </tr> <tr> <td>All Others Off</td> <td>Off</td> </tr> </tbody> </table>	DIP switch	↑ On/Off ↓	1,2,4,6,7,10,14	On	All Others Off	Off	<p>PSD DIP switch settings</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>DIP switch</th> <th>↑ On/Off ↓</th> </tr> </thead> <tbody> <tr> <td>1, 4</td> <td>On</td> </tr> <tr> <td>2, 3</td> <td>Off</td> </tr> </tbody> </table>	DIP switch	↑ On/Off ↓	1, 4	On	2, 3	Off
Part Number	Frequency Type	Number of Turns																																																																																																																		
A 012-001-074	High	1																																																																																																																		
B 012-001-094	Low	1																																																																																																																		
24VCB	24 Volt Circuit Breaker																																																																																																																			
CCB	Control Circuit Breaker																																																																																																																			
CHH	Crankcase Heater																																																																																																																			
CM	Compressor Motor																																																																																																																			
DMF	Damper Motor Fresh Air																																																																																																																			
DMR	Damper Motor Return Air																																																																																																																			
EEV	Electronic Expansion Valve																																																																																																																			
EMIFB	EMI Filter Board																																																																																																																			
ETH	Earth																																																																																																																			
FRB	Fault Relay Board																																																																																																																			
IFCB	Indoor Fan Circuit Breaker																																																																																																																			
IFM	Indoor Fan Motor																																																																																																																			
IBB	Insulated Bus Bar																																																																																																																			
MIS	Main Isolator Switch																																																																																																																			
OFCB	Outdoor Fan Circuit Breaker																																																																																																																			
OFM	Outdoor Fan Motor																																																																																																																			
PCLP	P Clip																																																																																																																			
RV	Reversing Valve																																																																																																																			
SCB	Socket Circuit Breaker																																																																																																																			
SPS	Single Phase Socket																																																																																																																			
TB	Terminal Block																																																																																																																			
TR	Transformer																																																																																																																			
UC8	Unit Controller 8																																																																																																																			
VSD	Variable Speed Drive																																																																																																																			
VSDCB	Variable Speed Drive Circuit Breaker																																																																																																																			
W	Cable Marker																																																																																																																			
Name	Type	Colour																																																																																																																		
DL	Discharge Temp	S GREY																																																																																																																		
SL	Suction Temp	S WHITE																																																																																																																		
AMB	Ambient Temp	S YELLOW																																																																																																																		
DEI	De-ice Temp	S BLUE																																																																																																																		
IC	De-ice Temp	S BLUE																																																																																																																		
LPT	Suction Pressure	T																																																																																																																		
HPT	High Pressure	T																																																																																																																		
SAT-3	TZT100 Terminals																																																																																																																			
12	24																																																																																																																			
B2	B																																																																																																																			
A2	A																																																																																																																			
0V	GND																																																																																																																			
Shield to 0V	24C																																																																																																																			
DIP switch	↑ On/Off ↓																																																																																																																			
1,2,4,6,7,10,14	On																																																																																																																			
All Others Off	Off																																																																																																																			
DIP switch	↑ On/Off ↓																																																																																																																			
1, 4	On																																																																																																																			
2, 3	Off																																																																																																																			
<p>Client External Protection and Isolator Switch</p>	<p>Economiser Option</p>	<p>Important Note! Unit requires 24 hour power supply for control circuit and crankcase heaters</p>	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>REV</th> <th>DESCRIPTION</th> <th>ECN</th> <th>DATE</th> <th>APPROVED</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Initial Release</td> <td></td> <td></td> <td></td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REV	DESCRIPTION	ECN	DATE	APPROVED	A	Initial Release																																																																																																										
REV	DESCRIPTION	ECN	DATE	APPROVED																																																																																																																
A	Initial Release																																																																																																																			
<p>Client Wiring</p>				<p>Drawn: P.P.D. Date: 09-12-22</p>	<p>Approved: A.V</p>																																																																																																															
<p>©temperzone Ltd 2020</p>				<p>Title: OPA 250RLTFPQ(-Z)-S2 UC8 Wiring Schematic</p>	<p>Rev: A</p>																																																																																																															