HITACHI

air Home 500

Cooling Only Wall Mounted Systems





Cooling & Heating



The system for people who don't want to think about air conditioning.



Peace of Mind with a 6 Year Warranty

The airHome wall mounted range comes with a comprehensive **6 year warranty** on parts and labour, so you can be assured of the reliability and quality of your airHome system.



Award-winning Design ideal for all types of interiors

airHome was designed according to Hitachi's Duality Design philosophy, combining superior engineering and subtle aesthetics to create Living Harmony within your home.



reddot winner 2022

No need to think about it

for each moment of your home life

Cotona 6 7

pperation with an cloud go appilor your pr

Go to pg. 8

Easy control

Go to pg. 9

Helps to clean & maintain itself

Discover FrostWash and Mould Guard Funct

Helps to purify your indoor air &

remove odours

Improve Indoor Air Quality with 3 different air purification technologies including ViroSense Z1 filter: effective at neutralising most viruses and bacteria that pass through the filter.

o to pg. 16-17


Selection guide & specs

View specifications of the **airHome** 500 range

Go to pg. 18 – 19

2



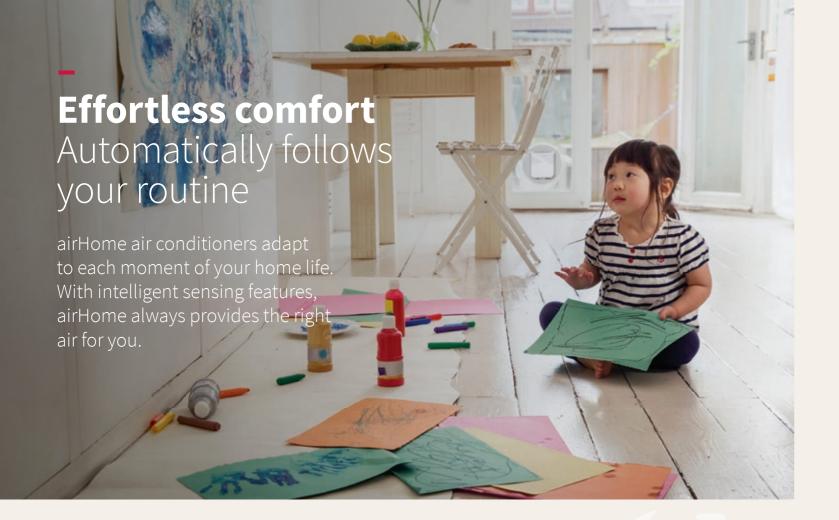

SleepSense: your sleep companion

Before you sleep

Activate SleepSense in one touch on your remote controller.

When you wake up in the morning

SleepSense detects when you're up, and it switches back to pre-sleep operation for a fresh start to the day.

During the night

SleepSense monitors your sleep. Once you fall asleep, SleepSense gradually reduces the air conditioning operation (change of temperature¹ + quieter operation) to create the ideal conditions for deep sleep.

Smart Eco cuts air conditioning when the room is vacant

With Smart Eco, indoor units will automatically adopt energy-saving mode when you're out of the room. You don't need to remember to turn your AC off; Smart Eco does it for you.




When you leave the room



Initial Operation

Smart Eco detects the room is now vacant, the cooling operation continues as you've set it for the next 20min.



After 20min of vacancy



Energy-Saving Operation

airHome automatically modifies the set temperature higher to reduce the power consumption.

When you return later to the room, human (or pet) presence is detected again and the AC returns to initial operation.

Optional: after 60min of vacancy



Auto-Off Option

Smart Eco automatically turns off the air conditioner to stop consuming energy.


More features providing adaptive comfort



Suitable for large rooms Distributes air effectively across any room in your house, reaching up to 24metres away² and automatically distributing air across a 105° by 60° 3-dimensional arc



Activate the 20-minute powerful mode For when you need rapid cooling



For humid days Dry operation dehumidifies the room efficiently and silently



So quiet, you'll forget it's on! Thanks to the unique wave - blade fan, the air conditioning will run quieter.



Ensures year-round comfort control Cooling operation up to +46°C outside.









Claim refers to models RAK-DJ50PCAT model on high fan speed creating an air velocity of 0.15m/s or more according

2 Airflow distance will vary according to fan speed setting, environmental factors and model capacity.



Voice control with Alexa and Google Home

Connect your **airHome** air conditioner² to your smart speaker for hands-free operation³.





airCloud Go: automated comfort as you come & go

next-generation airCloud app via home w


You will never worry if you've left the AC

on ever again.

Check and control your air conditioner's status from wherever you are, whenever you need.

Link your phone's location to your air conditioner with **airCloud** Go app's Smart-Fence function. Once you are within a preset distance from your home, your **airHome** air conditioner will automatically start to cool to your ideal temperature for when you arrive.

As you leave home, you can set your air conditioner to automatically turn off or switch to a more energy-efficient temperature.

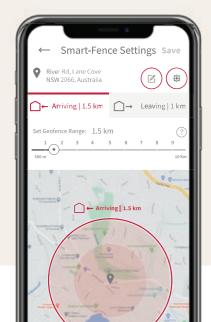

More **airCloud** Go features for better indoor climate control from the convenience of your phone



App Store

Turn the air conditioner on/off and set the desired temperature, fan speed and airflow direction.

Google Play

1

HITACHI




Program your air conditioning operation with the Simple Timer and/or Weekly Timer.



Pair your account with unlimited air conditioners.



Invite up to 20 users to manage each air conditioner.

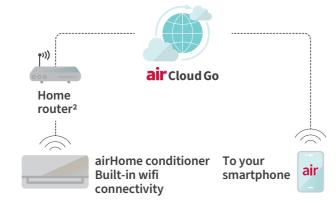

airCloud Go energy cost estimator

Track AC usage in your home and preview estimates of your daily, weekly, monthly and/or annual expenditure.

You can also set a budget limit and receive notifications as you near this threshold.

A brand-new design remote controller

With a more intuitive controller than ever before, controlling your air conditioner has never been easier.



New 'My Mode' button

The new 'My Mode' button enables you to save up to 3 combinations of your favorite settings (operation mode, set temperature, fan speed) so you can recreate your preferred climate in one touch.



0.5°C temperature control

Set the temperature by 0.5°C increments for more precise comfort.

airHome 500 remote controller

- 1 Access to a domestic wifi network is necessary to pair airHome to airCloud Go app.
- 2 Required router supporting 2.4GHz band.
- Amazon Echo supports English, French, Italian, Spanish, German
 Google Home supports English, French, Italian, Spanish, German, Portuguese-BR, Dutch, Danish, Swedish, Thailand, Chinese(Traditional), Indonesia.



Sh- Mode	(C)	SF Fan Speed
SleepSense	\wedge	Powerful Powerful
FrostWash	Temp	P Slert
OF	ter Re	ort O
On Timer	Smart Eco	Up/Down
(6)	称	/IIIX

9

8



Helps to clean & maintain

itself year after year



FrostWash: Better at maintaining peak performance¹

Over time, dust and dirt build up in your AC making it less powerful. Hitachi FrostWash technology continuously maintains the performance of your AC by removing dust and dirt with a unique technology.

Dirt deposits over time on the heat exchanger which leads to reduced airflow efficiency. The mould and dirt detach from the heat exchanger as the frost melts.

FrostWash double benefits:

Preserved performance

Our tests show that systems with FrostWash are better at maintaining airflow performance than those without this technology 1,2

Sanitising effects





Viruses

eliminated²











Mould reduction4

Go to pg. 16



Let FrostWash work when you're absent

FrostWash:

freeze the heat


exchanger. The frost captures the dirt.

• You can pre-set FrostWash to activate automatically when no one is in the room with motion sensor.



The dirt and mould

are washed away together with the

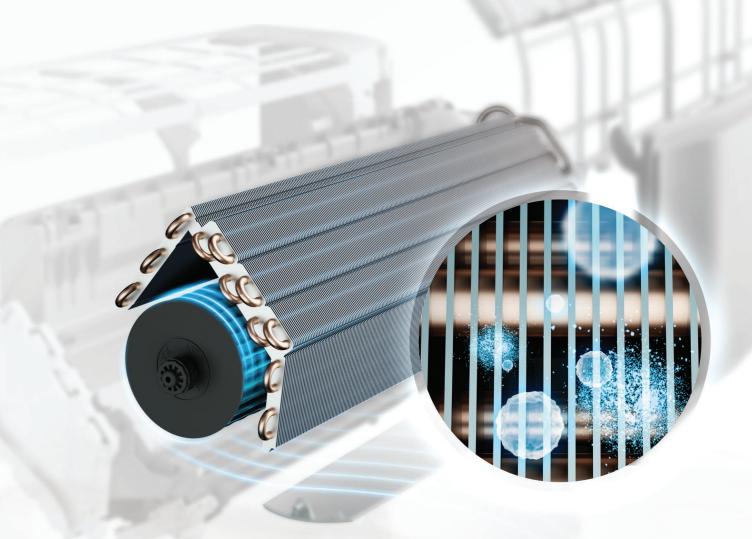

Mould guard function: Minimises mould formation & bad odours

Whenever your air conditioner is switched off, the mould guard function continues to run the fan to blow air through the internal components to dry them and prevent the primary cause of bad odours.


Easy filter cleaning process

Like all air conditioners, air Home's pre-filter can get clogged from the accumulation of dust. A small reminder lights up on your air conditioner when it's time to clean the filter.

It's simple to wash thanks to the easy to remove panel and washable filter material



- 1 Two identical units were tested for comparison; with and without FrostWash. Test chamber simulated approx. 2 years of dust and oil build up which may be experienced in a typical home environment. Airflow performance was tested before and after FrostWash being in the chamber. Unit without FrostWash experienced an 18% drop in airflow performance. Unit with FrostWash experienced only 6% performance drop. Tested at Johnson Controls-Hitachi Tochigi factory, Japan Nov/Dec 2021.
- 2 Claim refers to the effect of FrostWash technology which showed 99% reduction of virus particles on the heat exchanger tested at Kitasato Research Center of Environmental Science.
- 3 Claim refers to the effect of FrostWash technology which showed 99% reduction of bacteria on the heat exchanger tested at Kitasato Research Center of Environmental Science Japan.
- 4 Tested at Japan Textile Product Quality and Technology Center. Test method: ISO 18184: 2019 "Textiles -- Determination of antiviral activity of textile products." using SARS-CoV-2 NIID

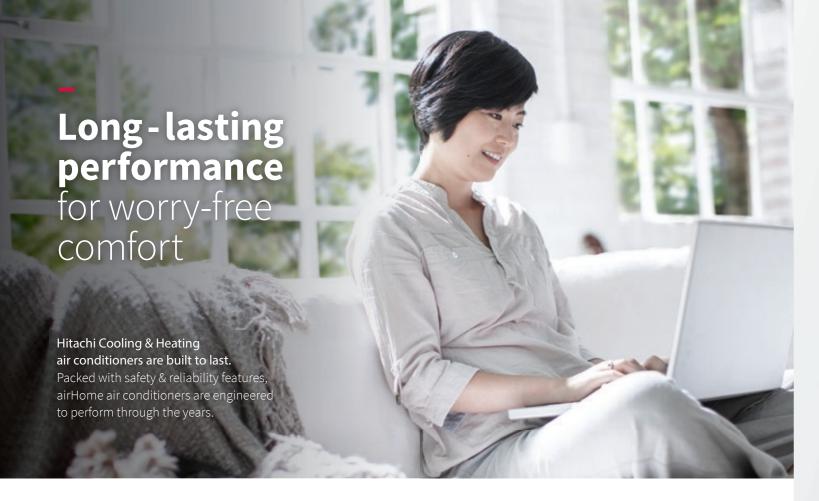

Complete SafeGuard system:

7 features to preserve your air conditioner equipment and extend its lifespan

Electric Risk Prevention

- 1 Hitachi dual-strong PCB can withstand voltage surges up to AC420V.
- 7 The **Power-Safe** where the available power supply is limited, the Power-Safe setting lowers the maximum running current to allow your airHome air conditioner to safely run without tripping the circuit breaker.
- 3 In the event of a power failure, the 3-Minute Delay Circuit prevents damage caused by multiple fast restarts.

Physical Risk SafeGuard

- 4 Anti-Corrosion Coated Fins protects against long-term damage caused by water, air, salt, and humid environments.
- 6 Anti-Rust Paint helps to protect the outdoor unit from rust and the unsightly peeling of paint.



- The valve cover protects the outdoor unit from water damage caused by condensation or leaking, channeling water safely away from
- The electronic components are covered by a Fireproof Electrical Enclosure to drastically reduce the risk of fire spreading in the event of a fault.





Automatic Fan Reverse on outdoor unit

To help remove any dust and small debris from the outdoor unit heat exchanger, the outdoor unit will briefly reverse spin the fan after you switch your AC unit off, helping maintain the performance of your system.













ViroSense Z1 filter

airHome embeds an extra filter to help purify your air. The ViroSense Z1 filter is coated with zinc pyrithion which actively combats airborne contaminants¹ neutralising most viruses and bacteria with up to 99.0% effectiveness on viruses², up to 99.0% effectiveness on bacteria³ from the air that passes through the filter.

Purifies your air



Not only does airHome keep you comfy,

but it also improves your Indoor Air Quality.

Combining up to 3 different air purification technologies for enhanced effectiveness against pollutants including certain viruses, allergens, bacteria and even odours.

Take a deep breath with the peace of mind of cleaner and purer air.

Nano-titanium pre-filter

Hitachi's unique Nano Titanium Pre-Filter features a coating of Nano Titanium that resolves adhering microbes and odours. Due to its sleek surface, even dust containing grease can be easily wiped off without using water.

FrostWash™

Heat exchanger cleaner automatically cleans the heat exchanger reducing the build up of remaining pollutants, mould, viruses and bacteria.

(Go to pg. 12 >

- WiroSense filter is expected to be effective during 12months.
 Tested at Japan Textile Product Quality and Technology Center.
 Test method: ISO 18184: 2019 "Textiles -- Determination of antiviral activity of textile products." using SARS-CoV-2 NIID isolated variant: JPN/TV/WK-521.
- ViroSense Z1 filter shows 99.9% of effectiveness against SARS-CoV-2 NIID isolated variant: JPN/TY/WK-521 and 99.0% effectiveness against Influenza A Virus (H3N2) tested at Japan Textile Product Quality and Technology Center using ISO18184:2019 method.
- Tested at Nissenken Quality Evaluation Center. Test method: JIS L1902: 2015 Bacterial Solution
 Absorption Method (Quantitative Test) using Staphylococcus aureus NBRC12732 and Escherichia coli
 NBRC3301.

16

Features & Options



air Home 500	
(Cooling Only)	

	(Cool	ing On
Built-in wi-fi	•	
Easy-to-use wireless backlit remote controller	•	
	_	

nsor	Motion sensor	•
Modes by Sensor	SleepSense - cool	•
Modes	Eco mode with motion sensor	•
	Save mode (max current switching)	•
	Auto off mode with motion sensor	•
lean	Automatic FrostWash	•
Air Purification & Clean	Manual FrostWash	•
rificati	Mould Guard	•
Air Pu	Outdoor unit Fan reverse (auto)	•
	Nano-titanium stainless steel pre-filter	•
	ViroSense anti virus filter	•
Comfort	Powerful mode	•
Con	Silent mode	•
	Dry mode	•
	My mode (personalised mode)	•
	Auto fan speed	•
	Fan only mode	•
	Up-down auto swing	•
	Left-right auto swing	•
	Long airflow	•

- Standard
- Optional Accessory

Control	Built-in wi-fi	•
ပိ	Easy-to-use wireless backlit remote controller	•
	Full dot wired remote controller	
	0.5°C temperature control	•
	DRED control/adapter	
	H-Link adapter	
	Run/alarm signal kit	
	24 Hr on/off timer	•
	Weekly timer (with airCloud Go)	•
	Simple timer - on off	•
	SmartFence (with airCloud Go)	•
	Energy usage tracking (with airCloud Go)	•
	Voice control - with airCloud Go (through Google/Amazon Alexa)	•
ence	Info button (with airCloud Go)	•
Convenience	Auto restart	•
ŭ	Filter sign	•
	Remote Start/Stop	-
Reliability	Fireproof electrical enclosure	•
Relia	PCB surge protection	•
	Anti-corrosion treated outdoor heat exchanger	•
	Anti-rust painted outdoor casing	•
	3-Minute delay circuit	•



RAK-DJ25PCAT - 2.5kW Model RAK-DJ35PCAT - 3.5kW Model







RAK-DJ70PCAT - 7.0kW Model

Specifications





Seri	ios			airHome 500 (Coo	oling only)	2024		
JCII	103	Indoor Unit		RAK-DJ25PCAT	RAK-DJ35PCAT	RAK-DJ50PCAT	RAK-DJ60PCAT	RAK-DJ70PCAT
Model		Outdoor Unit		RAC-DJ25PCAT	RAC-DJ35PCAT	RAC-DJ50PCAT	RAC-DJ60PCAT	RAC-DJ70PCAT
ور	Rated Capacity	Cooling	kW	2.5 (1.0 - 3.6)	3.5 (1.0 - 4.1)	5.0 (1.8 - 6.4)	6.0 (1.8- 6.8)	7.0 (2.5 - 8.3)
& Kating	(Min Max.)	Cooling	KVV	2.5 (1.0 - 5.0)	3.3 (1.0 - 4.1)	3.0 (1.8 - 0.4)	0.0 (1.8- 0.8)	1.0 (2.3 - 6.3)
zy S	Rated Cooling Power Input (Min Max.)	Cooling	kW	0.49 (0.25 ~ 1.29)	0.84 (0.25 ~ 1.46)	1.16 (0.50 ~ 3.05)	1.57 (0.50 ~ 3.05)	2.04 (0.50 ~ 3.50)
-apacity	Dehumidification		I/h	1.4	1.6	2.0	2.8	4.8
ر		Hot Zone	cooling	6.5	5.5	5.0	4.0	3.5
	Zone Energy Efficiency	Mixed Zone	cooling	5.5	5.0	4.5	4.0	3.5
	Star Rating	Cold Zone	cooling	6.0	5.0	4.5	4.0	3.5
		AEER		5.05	4.12	4.29	3.81	3.42
SUC	Power Supply	V/	Phase / Hz	220-240V / 1Ph / 50Hz				
Specifications	Rated Running Current	Cooling	Amps	2.77	4.26	5.12	6.92	9.00
Spec	Maximum Current		Amps	5.10	6.20	13.50	13.50	15.00
nical	Interconnecting Wire			3+EARTH				
Technical	Power supply To			outdoor unit				
	Operation Range	Cooling	°C	-10°C ~ 46°C				
	Diameter of Pipes	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.70	6.35 / 12.70	6.35 / 12.70
		Туре		R32				
	Refrigerant	Factory pre- charged length	m	20	20	30	30	30
	Min. / Max. / Lift Pipe Length		m	3 / 20 / 15	3/20/15	3/30/20	3/30/20	3/30/20
		Dimension (WxHxD)	mm	780 × 280 × 222	780 × 280 × 222	950 x 294 x 230	950 x 294 x 230	1050 × 294 × 250
	Indoor Unit	Weight	kg	8.5	8.5	11	11	12.2
		Fan Speeds		Super High / High / Medium / Low / Quiet (+ Auto)				
		Air Flow (cooling)	I/s	161/124/87/56/53	174/139/111/69/59	261/235/199/142/120	279/252/212/152/128	320/288/243/182/15
		Noise (cooling)	dB(A)	40 / 38 / 33 / 24 / 20	43 / 40 / 36 / 26 / 22	46 / 44 / 40 / 34 / 30	48 / 45 / 42 / 34 / 30	48 / 46 / 42 / 36 / 3
	Outdoor Unit	Dimensions (WxHxD)	mm	759 × 548 × 288	759 × 548 × 288	850 × 800 × 298	850 × 800 × 298	850 × 800 × 298
		Weight	kg	30	30	46	46	46
		Sound Power	dB(A)	60	61	64	64	65
		Sound Pressure	dB(A)	46	47	52	52	54

The Rated Capacity, Power Input and Running Current are measured under T1 (cooling) conditions.

Cooling: Indoor temp: 27°CDB / 19°CWB Outdoor temp: 35°CDB / 24°CWB

The indoor and outdoor unit sound levels are measured in an $\,$

- anechoic chamber:- 1 metre from the air outlet grille
- 0.8 metre beneath indoor height centre





Temperzone Australia Pty Ltd

ENQUIRIES

nswsales@temperzone.com vicsales@temperzone.com qldsales@temperzone.com sasales@temperzone.com

AUSTRALIA

Sydney: (02) 8822 5700 Melbourne: (03) 8769 7600 Brisbane: (07) 3308 8333 Adelaide: (08) 8115 2111

DISTRIBUTORS

Newcastle: (02) 4962 1155 Perth: (08) 6399 5900 Launceston: (03) 6331 4209



WARRANTY

Must be maintained in accordance with maintenance recommendations

hitachiaircon.com.au



The specifications of this catalogue may change without prior notice to allow Hitachi Cooling & Heating to incorporate the latest innovations for its customers. The information contained in this catalogue is merely informative. Hitachi Cooling & Heating declines any responsibility in the broadest sense, for damage, direct or indirect, arising from the use and / or interpretation of the recommendations in this catalogue.